

NEW
V.4

CAMRegis


Temperature and humidity loggers, according to European Standard EN 12830





Inputs for NTC, Pt1000 digital and 4-20 mA probes.

Large, high luminosity graphic display. Setup wizard and text menus in multiple languages, with on-screen help. Quick print button, to print out the last calendar week of all entries logged. Internal memory up to three years, with a recording frequency of 15 minutes. Designed in compliance with European standard EN 12830. Integrated RS485 communications. ModBus protocol. Possibility of connecting Pt100 probes to 5-input units.

Application: Industrial and commercial refrigeration, processing industry, etc.

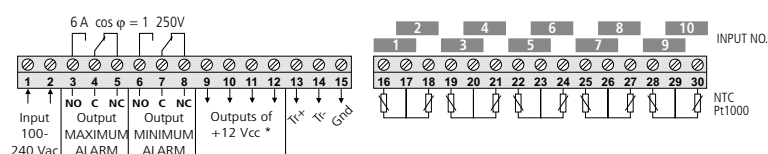

Example of connection of other probes:



- Temp range -150 °C to +590 °C
- Range 4-20 mA -999 °C to +999 °C
- Display & logging 0,1 °C.
- Accuracy ± 1 °C
- Input accuracy 4-20 mA $\pm 1\%$ (mA)
- Box dimensions 230 x 230 x 90 mm
- 5 and 10 input logger included 5 NTC probes
- 2 input logger included 2 NTC probes
- Alarm relays 2 SPDT 8 A, 250 V
- Power supply 100 a 240 V~
- IP65 protection
- Autonomy 6 hours recording, 3 months to maintain time and date
- 5, 15 or 30 min recording interval
- New Feature TTI To The Right Food Preservation

Reference	Description	Family	Pack
AKO-15780	CAMRegis-2, 2-input temperature and humidity logger	CAMREGIS-Data loggers	1 Unit
AKO-15782	CAMRegis-2i, 2-input temperature and humidity logger + printer	CAMREGIS-Data loggers	1 Unit
AKO-15750	CAMRegis-5, 5-input temperature and humidity logger	CAMREGIS-Data loggers	1 Unit
AKO-15752	CAMRegis-5i, 5-input temperature and humidity logger + printer	CAMREGIS-Data loggers	1 Unit
AKO-15740	CAMRegis-10, 10-input temperature and humidity logger	CAMREGIS-Data loggers	1 Unit
AKO-15742	CAMRegis-10i, 10-input temperature and humidity logger + printer	CAMREGIS-Data loggers	1 Unit
AKO-14901	NTC probe from -50 to +100 °C, 1,5 m cable	Temperature	48 Units
AKO-14903	NTC probe from -50 to +100 °C, 3 m cable	Temperature	48 Units
AKO-14906	NTC probe from -50 to +100 °C, 6m cable	Temperature	48 Units
AKO-80013	Wall humidity probe, 10 a 95%, -5/50°C, output 4-20 mA	Accessories	1 Unit
AKO-80040	tubular humidity probe, 5%-95%, -10/70 °C, output 4-20 mA	Accessories	1 Unit
AKO-15703	Spare roll of thermal paper	CAMREGIS-Data loggers	10 Units
AKO-15704	Spare battery	CAMREGIS-Data loggers	1 Unit
AKO-80039	USB/RS485 converter with 2 m cable to PC	Accessories	1 Unit
AKO-5008	SOFTRegis, software for managing and monitoring CAMRegis loggers	Software	1 Unit
AKO-15586	Metre of cable for extending probes, 3 x 0,5 mm2 shielded	Temperature	100m (A)