



230x210mm



WALL MOUNTING



PANEL MOUNTING

## COOL MATE

### XLH200/300 COOL MATE SERIES: NT and LT APPLICATIONS and MATURING ROOMS with TEMPERATURE/HUMIDITY MANAGEMENT

- Advanced multifunction controllers with temperature and humidity management
- Cooling and heating action for safe storage of products
- Defrost management
- Possibility of excluding humidity control
- Dehumidifying action by cooling circuit
- Running and stopping programmable cycles with different set points (XLH300)
- Automatic cycles of extraction fans (XLH300)
- Direct line power supply 230 (110)Vac. No external transformer required
- Instant visibility of machine status via display icons
- Fast and easy wiring
- Designed to be wall or panel mounted
- Hot Key or Prog Tool Kit connector for quick and easy programming
- Serial connection to monitoring systems
- 10VA max power absorption
- Dual display with red LED (25.3mm high) and yellow LED (20.3mm high) and 17 icons

#### HOW to ORDER

XLH200/300 X L H 6 0 - A 0 0 D E

A	D	E
<b>Power supply</b>	<b>Measurement unit</b>	<b>RS485 output</b>
2 = 24Vac	C = °C	0 = No
4 = 110Vac	F = °F	1 = Yes
5 = 230Vac		

# CONTROLLERS with TEMPERATURE/HUMIDITY MANAGEMENT for NT and LT COLD ROOMS and MATURING ROOMS

# XLH200/300

**XLH260** | Digital controller for NT and LT cold rooms with temperature and humidity management


**XLH360** | Digital controller for maturing rooms with temperature and humidity management and timed cycles



230x210mm

FEATURES	XLH260	XLH360
<b>First display: n° digits</b>	± 3 d.p.	± 3 d.p.
<b>Second display: n° digits</b>	± 4 d.p.	± 4 d.p.
<b>Keyboard: push buttons</b>	6	8
<b>Power supply</b>	24, 110, 230Vac	24, 110, 230Vac
<b>Probe inputs</b>		
Thermostat	NTC	NTC
Defrost	NTC	NTC
Humidity	4÷20mA	4÷20mA
<b>Digital inputs</b>		
Alarm, block alarm, pressure switch, start defrost, energy saving, ON/OFF, AUX, holiday	config	config
Door switch	pres	pres
<b>Relay outputs</b>		
Compressor	20A	20A
Defrost	16A	
Defrost, extractor fans		16A config
Fans	8A	8A
Heater control	20A	20A
Humidifying	8A	8A
Dehumidifying, light	16A config	16A config
<b>Other</b>		
Hot Key/Prog Tool Kit output	pres	pres
Serial output	RS485 opt	RS485 opt
Buzzer	pres	pres

## XLH260

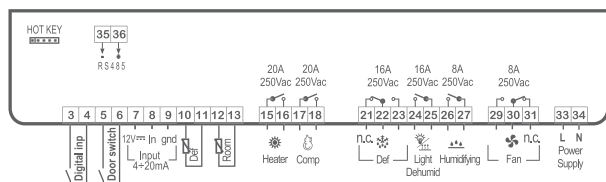

## XLH360

