


Control unit for 4 up to 8 sensors

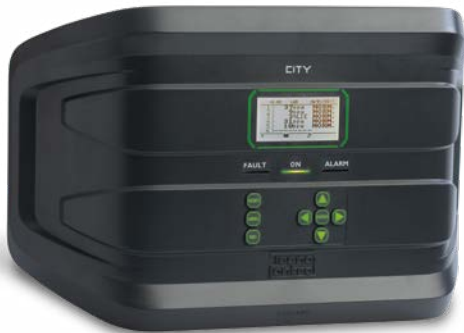

CITY - CE408P

CE IP40

Power Supply : 110÷230 Vac

Inputs: max 8 detectors (4 installed expandable to 8 with ES404 board)

Logical inputs: 1 for an immediate alarm (ex. button)

Output relay: max 9 (5 installed expandable to 9 with ES414 board)

Capacity relay: 3A (resistives) SPDT 230Vac

Alarm levels: 3 programmable levels + fault, level programmable in zone

Dimensions: 379(l)x241(h)x133(p) mm

CE408P



ACCESSORIES

ES404: board with 4 inputs 4-20 mA sensors (max 1)

ES404

ES414: board with 4 output relays (max 1)

ES414

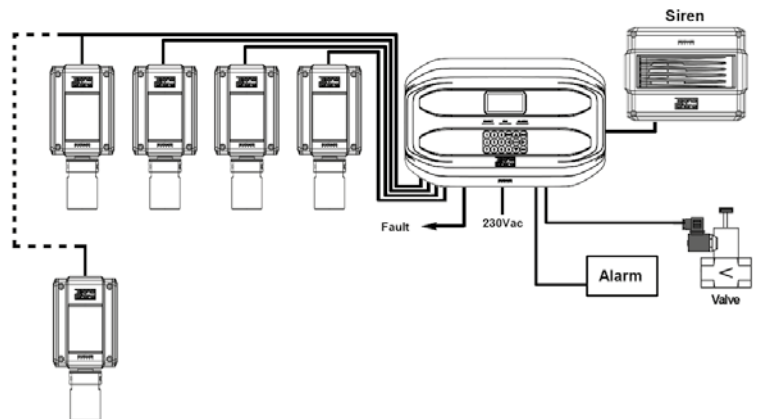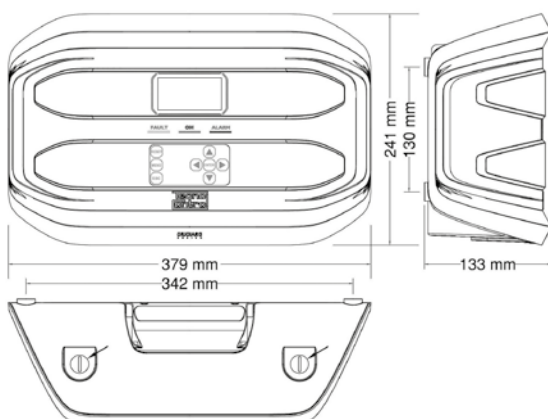

Ideal control panels for small gas detection systems, high performances. The big back lighted display placed on the front panel allows the actual visualization in real time of all reading values of the connected sensors. Equipped by 4 inputs and 5 relays, expandable up to 8 detectors and 9 outputs relays through specific expansion boards. The intuitive keyboard allows in an intuitive way to use the control panel and the programming is facilitated by the self-driving system and by the pre-configuration of our detectors.

- Compatible to all sensors series "SE" and "TS" with output 4-20mA
- Easy setup with pre-configured list of pre-programmed detectors
- Configuration protected by a password (3 safety levels)
- AND, OR and PARKING (DM 1/2/86 o EN50545-1), logical operation usable in zones
- Alarm programming as TLV exposure limit values
- "RESET" function
- Last events visualized on the display (100)
- Operation/Working visualization with backlighting display
- Clock with automatic daylight saving time
- Check inputs/outputs boards presence
- Firmware updating by SD-Card
- N° 2 batteries of 12V 1,3 Ah can be accommodate